

Part No. WATT-5018FS-XX

18GHz 50W SMA Fixed Attenuator



Features:

- Smallest models made
- Low VSWR
- All attenuation values available



Electrical Specification

Frequency	DC-18GHz
Attenuation Availability	3.5.6.10.20.30.40 dB
Accuracy (Max.)	3.5.6.10 dB:±0.8dB 20dB:±0.9dB 30dB:±1.1dB 40:±1.3dB XX: 01=1dB , 10=10dB
V.S.W.R (Max.)	1.45:1(Max.)
Input Power	Avg. 50Watts ,Peak 1000Watts(5 μ sec pulse,2.5% duty cycle)
Impedance	50 ohm
Connection	Input:SMA Male , Output:SMA Female

Outline


SMA Connector	Stainless Steel
---------------	-----------------

Environmental Specification

Operating Temperature	-55~+125°C
-----------------------	------------

Outline

Unit:mm

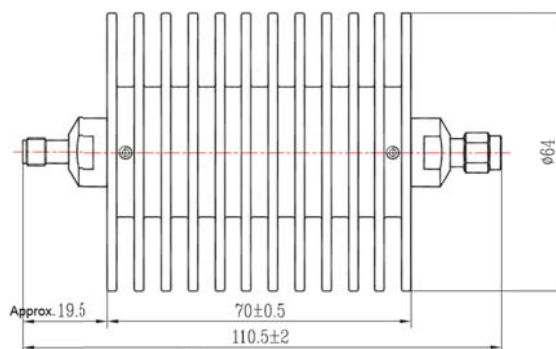

Test Report

40dB

