

Part No. WCBA-WC5129M.29M0.135

40GHz 0.135M WC51 Semi-rigid Cable Assembly 2.92mm(M)-2.92mm(M) Bending



Features:

- High Shielding Effectiveness
- Low Insertion Loss
- Low VSWR



WC51 Raw Cable Electrical Specification

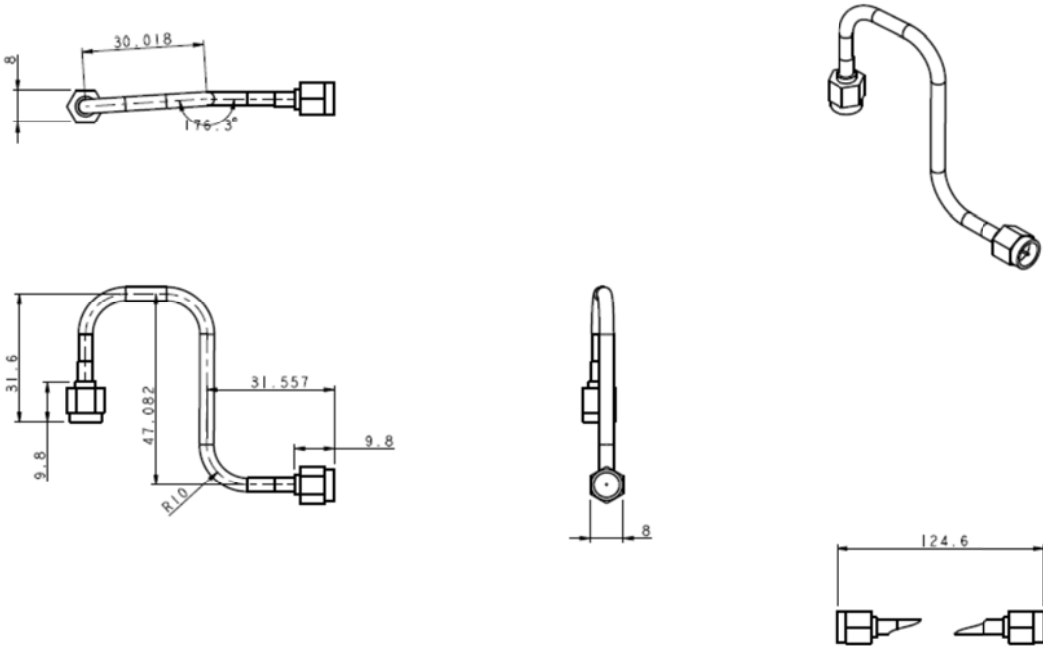
Cut-Off Frequency	67GHz							
Operating Frequency	40GHz							
Frequency	0.5	1	6	10	20	26.5	40	GHz
Attenuation	0.45	0.65	1.67	2.20	3.24	3.80	4.83	dB/m
Power	366	256	100	76	51	44	34	W
Velocity of Propagation	70%							
Shielding Effectiveness	>-165dB							
Min. Bend Radius	8.8mm							
Impedance	50 ohm							

WC51 Raw Cable Mechanical / Material Specification

Description	Material	Diameter
Center Conductor	SCCS	0.51 mm
Dielectric	PTFE	1.68 mm
Outer Conductor	Copper Tube	2.20mm

WC51 Raw Cable Environmental Specification

Operating Temperature	-55 ~+125°C
-----------------------	-------------

Cable Assembly Specification	
40GHz 0.135M WC51 Semi-rigid Cable Assembly 2.92mm(M)-2.92mm(M) Bending	
Part No.	WCBA-WC5129M.29M0.135
Length	0.135M
Frequency	40GHz (max.)
VSWR	1.35:1(max.)
Insertion Loss	2.0dB (max.)
Outline (Unit:mm)	

Test Report

