

Part No. WDCB-4029I

0.03-40GHz 2.92mm(M-F) Inner D.C. Block



Features:

- High performance
- Compact size
- Light weight



Electrical Specification

Frequency	30MHz-40GHz
Impedance	50 Ohm
Insertion Loss	0.8dB max
V.S.W.R	1.3:1 max
DC Input Voltage	50 V
Break Down Voltage	200V
Input Power	2W max.
Connector Type	2.92 mm

Material Specification


Housing	Type 303 Stainless Steel-Polished & Passivated
Center Contact	Gold Plated Beryllium Copper
Insulator	PEI

Environmental Specification

Operating Temperature	-55~+165°C
-----------------------	------------

Outline

Unit:mm(inch)

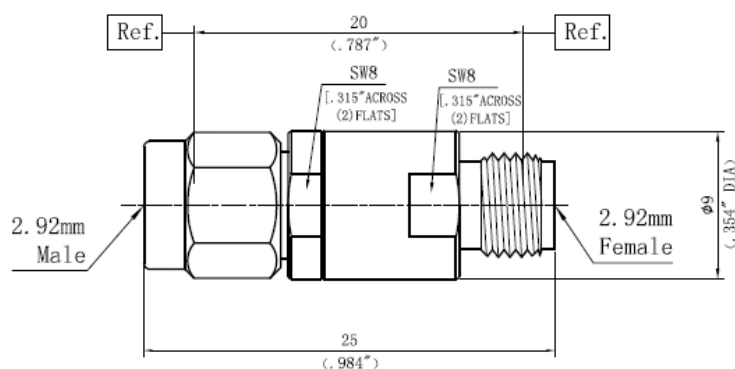

Test Report

