

Part No. WFIL-B1550-1620F-01

1550-1620MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	1550-1620MHz
Description	Bandpass Filter
Insertion Loss	1.2dB max.
Return Loss	20dB min.
Rejection	DC-1530MHz:30dB min. 1650-3000MHz:30dB min.
Power Handling	40W
Impedance	50 Ohm
Connector Type	SMA
Approx. Size	81x62x36 mm

Environmental Specification

Operating Temperature	-20~65°C
-----------------------	----------

Outline

Unit:mm

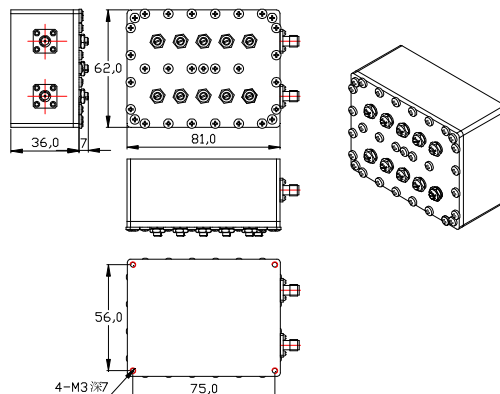

Test Report

