

Part No. WFIL-B1700-1880F

1700-1880MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	1700-1880MHz
Description	Bandpass Filter
Insertion Loss	2.0dB max.
Return Loss	14dB min.
Rejection	DC-1660MHz:40dB min. 1920-3000MHz:40dB min.
Power Handling	5W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55℃

Outline

Unit:mm

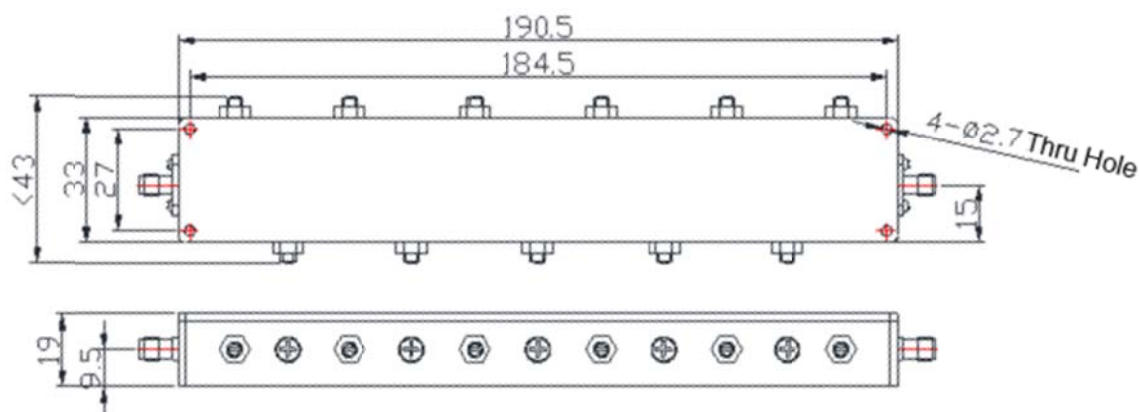

Test Report

