

Part No. WFIL-B1710-2200F

1710-2200MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	1710-2200MHz
Description	Bandpass Filter
Insertion Loss	1.0dB max.
VSWR	1.5:1 max.
Rejection	DC-1610MHz:50dB min. 2300-6000MHz:50dB min.
Power Handling	100W
Impedance	50 Ohm
Connector Type	SMA Female

Environmental Specification	
Operating Temperature	0~+50°C

Outline

Unit:mm

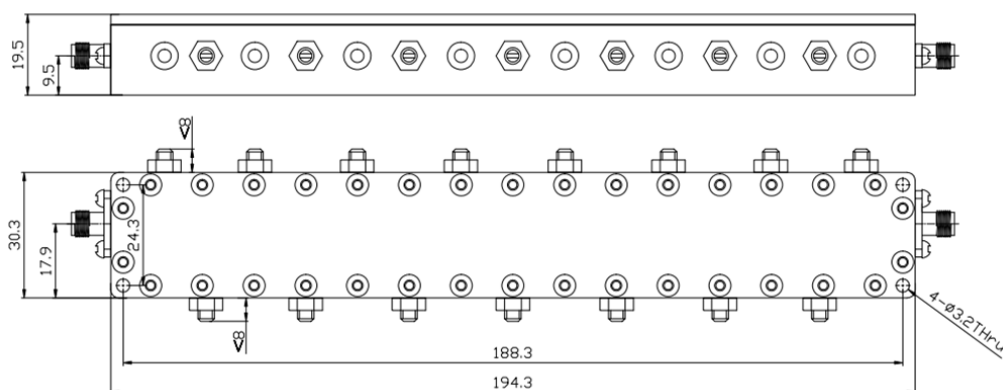

Test Curve

