

Part No. WFIL-B1880-1920F

1880-19200MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	1880-1920MHz
Description	Bandpass Filter
Insertion Loss	1.5dB max.
VSWR	1.5:1 max.
Rejection	DC-1800MHz:50dB min. 1950-6000MHz:50dB min.
Power Handling	100W
Impedance	50 Ohm
Connector Type	SMA Female

Environmental Specification	
Operating Temperature	0~+50°C

Outline

Unit:mm

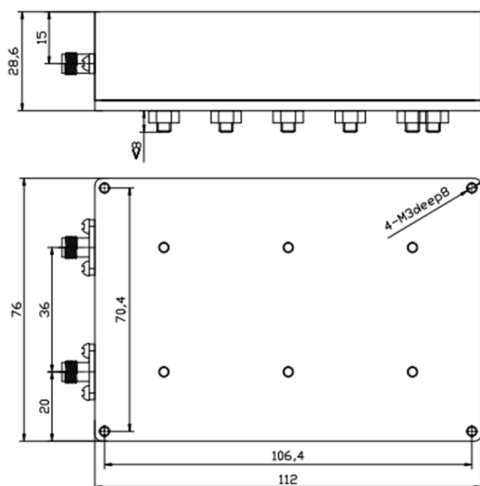

Test Report

