

Part No. WFIL-B2400-2500F-01

2400-2500MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	2400-2500MHz
Description	Bandpass Filter
Insertion Loss	1.5dB max.
Return Loss	18dB min.
Rejection	DC-2350MHz:50dB min. 2550-6000MHz:50dB min.
Power Handling	20W
Impedance	50 Ohm
Connector Type	SMA
Approx. Size	76x52x24 mm

Environmental Specification

Operating Temperature	-20~+65°C
-----------------------	-----------

Outline

Unit:mm

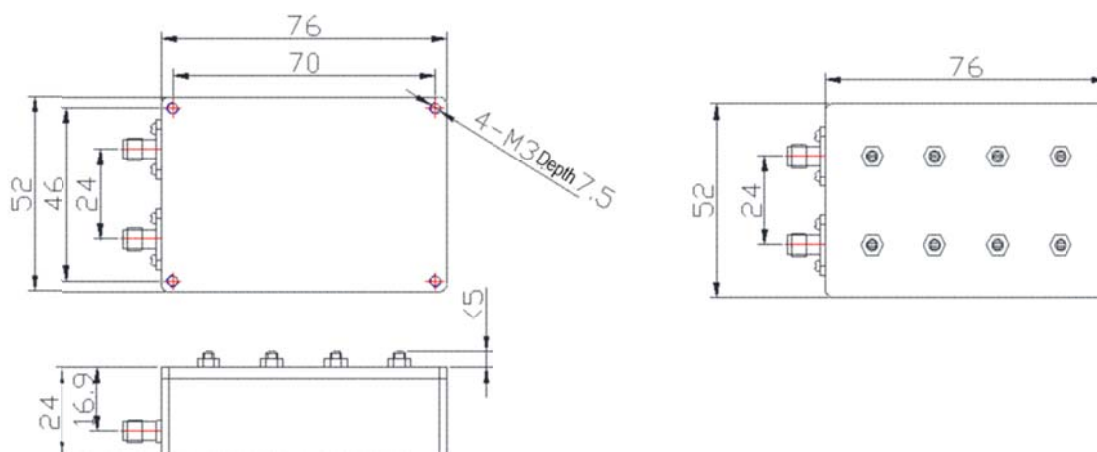

Test Report

