

Part No. WFIL-B2400-2700F

2400-2700MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	2400-2700MHz
Description	Bandpass Filter
Insertion Loss	2.0dB max.
Return Loss	14dB min.
Rejection	DC-2300MHz:40dB min. 2800-4000MHz:40dB min.
Power Handling	5W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

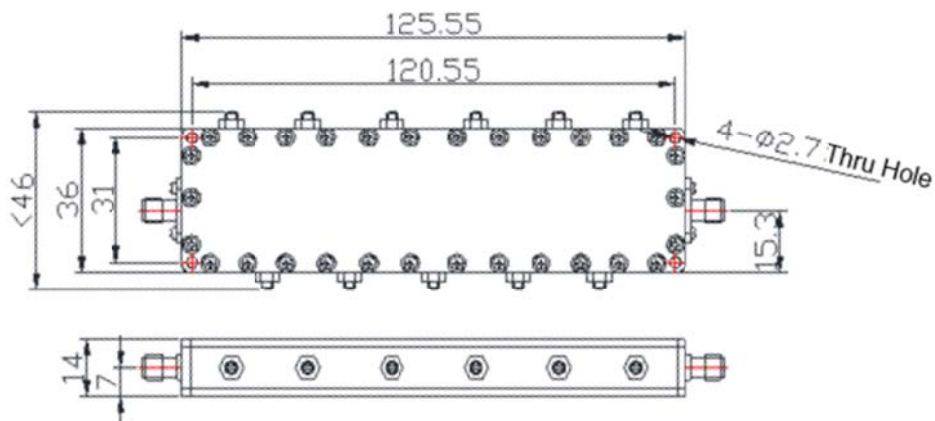

Test Report

