

**Part No. WFIL-B3300-4200F**

**3300-4200MHz Bandpass Filter/SMA**



**Features:**

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	3300-4200MHz
Description	Bandpass Filter
Insertion Loss	2.0dB max.
Return Loss	14dB min.
Rejection	DC-3200MHz:40dB min. 4300-5500MHz:40dB min.
Power Handling	5W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55°C

**Outline**

Unit:mm

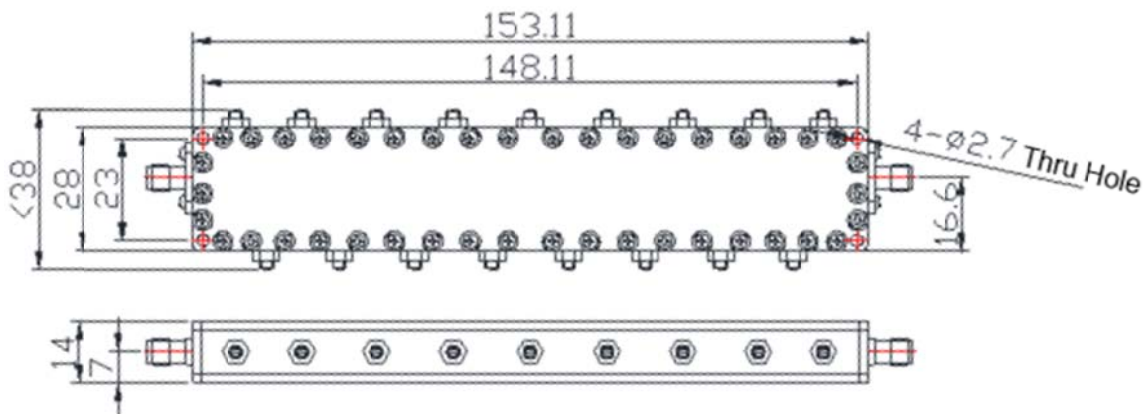

Test Report

