

**Part No. WFIL-B5000-6000F**

**5000-6000MHz Bandpass Filter/SMA**



**Features:**

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	5000-6000MHz
Description	Bandpass Filter
Bandwidth	1000MHz
Insertion Loss	0.6dB max.
Return Loss	11.7dB min.
Passband Ripple	0.5dB max.
Rejection	DC-4700MHz:50dB min. 6300-10000MHz:50dB min.
Power Handling	20W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	-10~+60°C

**Outline**

Unit:mm

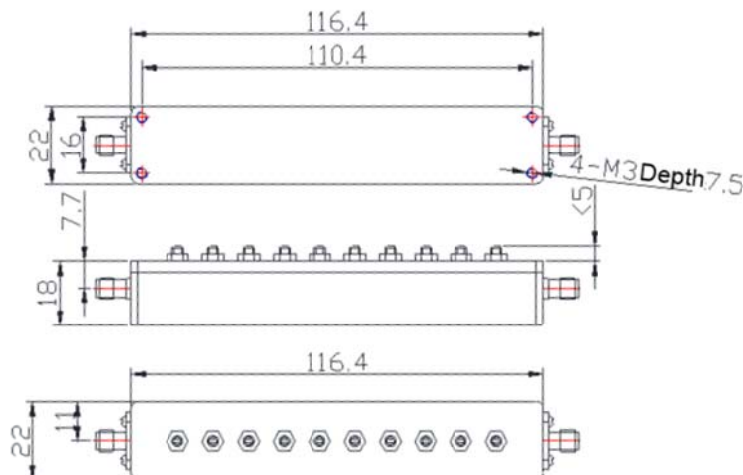

Test Report

