

Part No. WFIL-B7180-7680F

7180-7680MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	7180-7680MHz
Description	Bandpass Filter
Insertion Loss	1.3dB max.
VSWR	1.5:1 max.
Rejection	7000-7125MHz:27dB min. 7735-8000MHz:27dB min.
Power Handling	10W
Impedance	50 Ohm
Connector Type	SMA Female

Environmental Specification	
Operating Temperature	0~+50°C

Outline

Unit:mm

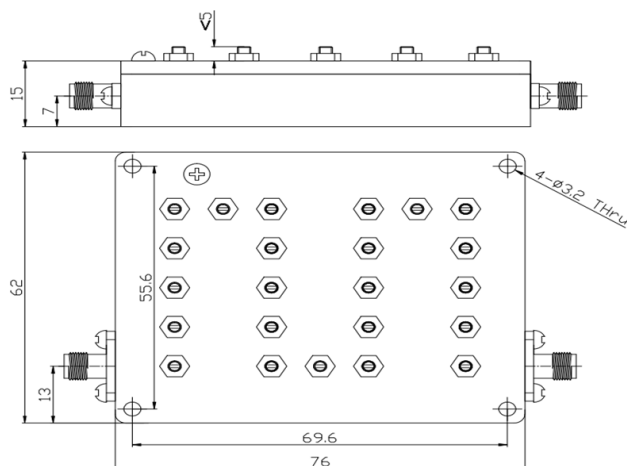

Test Curve

