

Part No. WFIL-B7750-8250F

7750-8250MHz Bandpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Passband Frequency	7750-8250MHz
Description	Bandpass Filter
Insertion Loss	1.4dB max.
VSWR	1.5:1 max.
Rejection	7500-7700MHz:23dB min. 8300-8500MHz:23dB min.
Power Handling	10W
Impedance	50 Ohm
Connector Type	SMA Female

Environmental Specification	
Operating Temperature	0~+50°C

Outline

Unit:mm

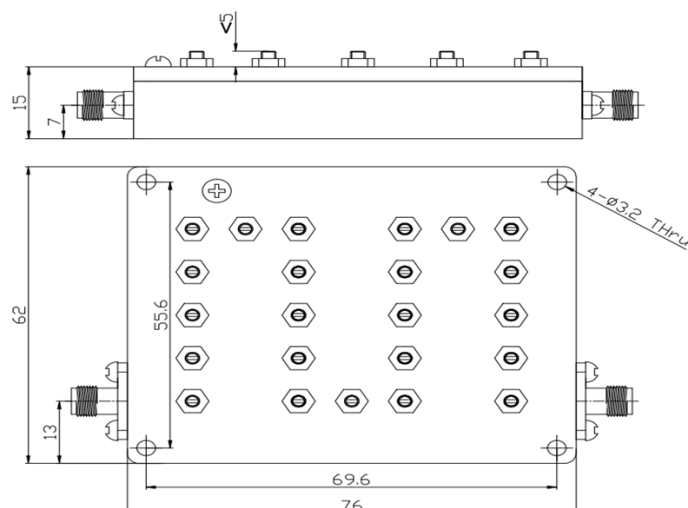

Test Curve

