

Part No. WFIL-D2400-5900F

I.S:40dB B1:2400-2500MHz B2:5100-5900MHz Diplexer/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Diplexer Filter
High Band	
Passband	5100-5900MHz
Insertion Loss	0.8dB max.
Return Loss	14dB min.
Low Band	
Passband	2400-2500MHz
Insertion Loss	0.8dB max.
Return Loss	14dB min.
Co-Channel Isolation	40dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA Female

Environmental Specification

Operating Temperature	-10~+55°C
-----------------------	-----------

Outline

Unit:mm

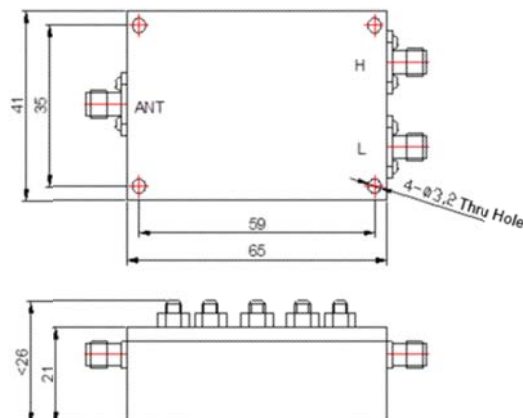

Test Report

