

Part No. WFIL-L1450F

DC-1450MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	DC- 1450MHz
Description	Lowpass Filter
Insertion Loss	1.5dB max.
Return Loss	10.8dB min.
Rejection	1700MHz : 30dB min.
Impedance	50 Ohm
Power Handling	3W
Connector Type	SMA Female

Environmental Specification

Operating Temperature	-20~+65°C
-----------------------	-----------

Outline

Unit:mm

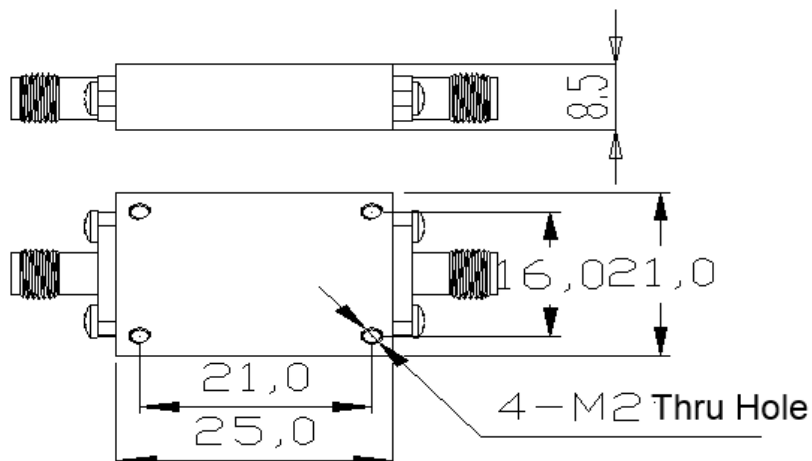

Test Report

