

Part No. WFIL-L1500F

DC-1500MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Passband Frequency	DC- 1500MHz
Description	Lowpass Filter
Insertion Loss	1.5dB max.
Return Loss	14dB min.
Rejection	2060-6000MHz : 50dB min.
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA Female

Environmental Specification

Operating Temperature	-20~+65°C
-----------------------	-----------

Outline

Unit:mm

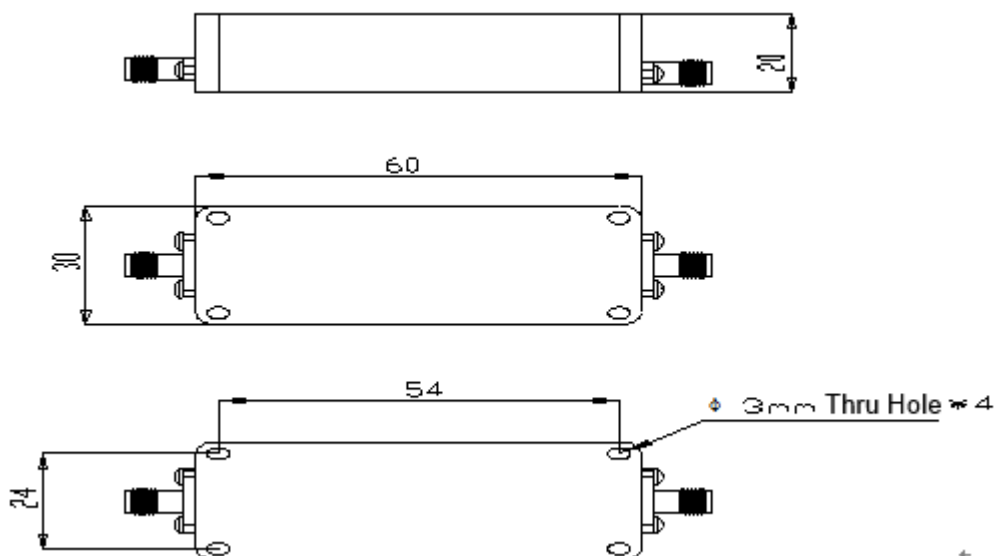

Test Curve

