

Part No. WFIL-L2200F-01

DC-2200MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Pass Band Frequency	DC-2200MHz
Description	Lowpass Filter
Insertion Loss	1.0dB typ. 1.5dB max.
Return Loss	10.9dB min.
Rejection	3300-18000MHz :40dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA Female

Environmental Specification	
Operating Temperature	-10~+60°C

Outline

Unit:mm

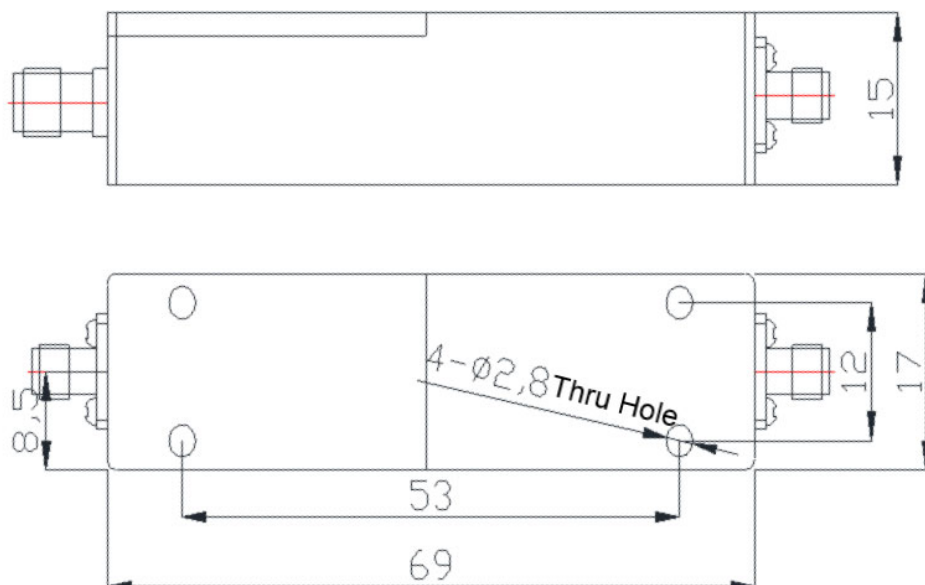

Test Report

