

Part No. WFIL-L2700F-02

DC-2700MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	DC-2700MHz
Description	Lowpass Filter
Insertion Loss	1.0dB max.@DC-2GHz 1.3dB max.@2-2.7GHz
Return Loss	14dB min.
Rejection	2970-18000MHz :40dB min.
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification

Operating Temperature	5~+45°C
-----------------------	---------

Outline

Unit:mm

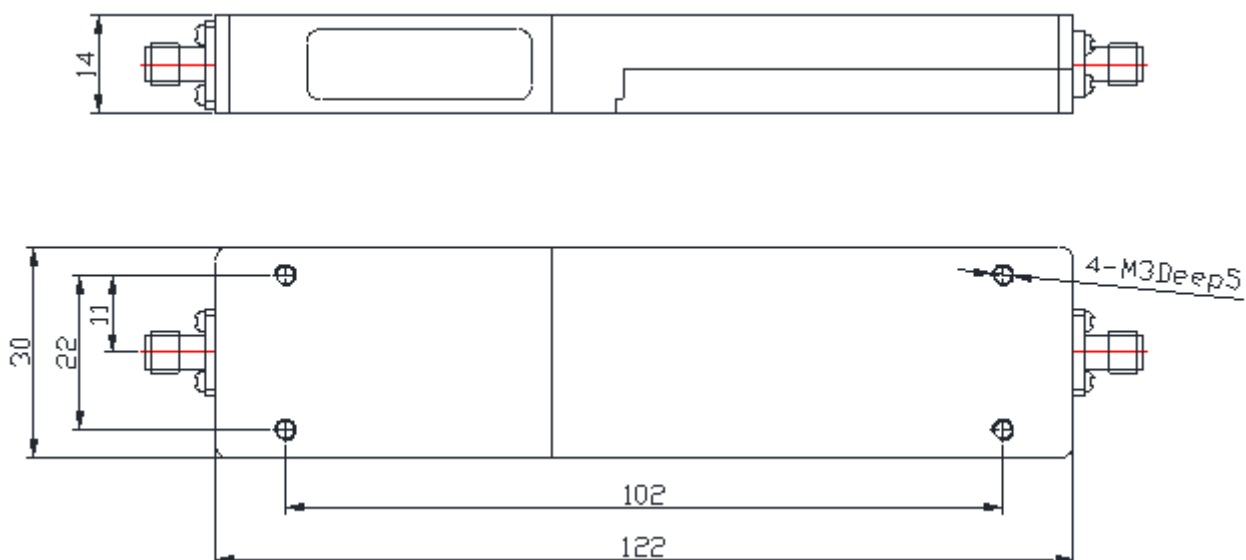

Test Report

