

Part No. WFIL-L300F

DC-300MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	DC-300MHz
Description	Lowpass Filter
Insertion Loss	DC-260MHz:1.5dB max. 260-300MHz:2.0dB max.
Return Loss	10dB min.
Rejection	400-450MHz :50dB min. 450-12750MHz: 30dB min.
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification

Operating Temperature	-10~+55°C
-----------------------	-----------

Outline

Unit:mm

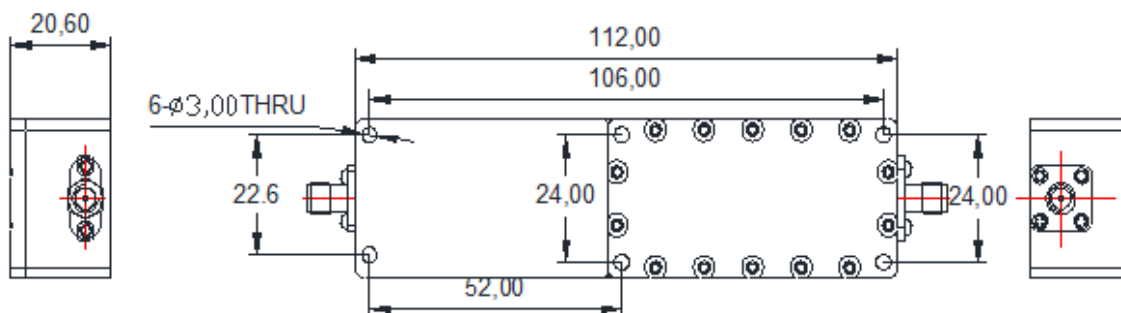

Test Report

