

Part No. WFIL-L4500F-02

DC-4500MHz Lowpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	DC-4500MHz
Description	Lowpass Filter
Insertion Loss	0.7dB max. (1.2dB max.@ passband corner)
Return Loss	14dB min.
Rejection	4950-8000MHz:40dB min.
Impedance	50 Ohm
Power Handling	15W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

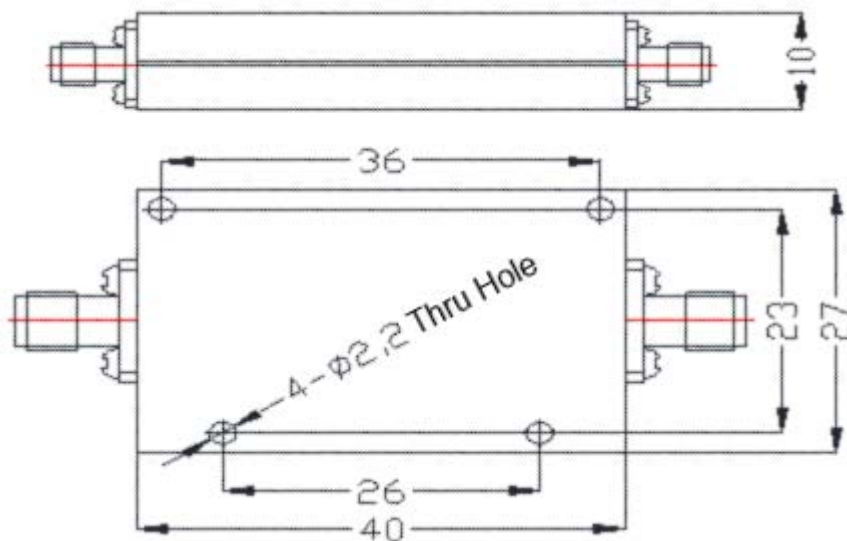

Test Report

