

Part No. WFIL-N1930-1990F-01

1930-1990MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Description	Notch Filter
F0	1,960MHz
Notch Depth	60dB min.: 1,930-1,990MHz
Passband	DC-1,880MHz , 2,200-6,000MHz
Insertion Loss	1.4dB max.
Return Loss	10dB min.
Power Handling	20W max.
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+50℃

Outline

Unit:mm

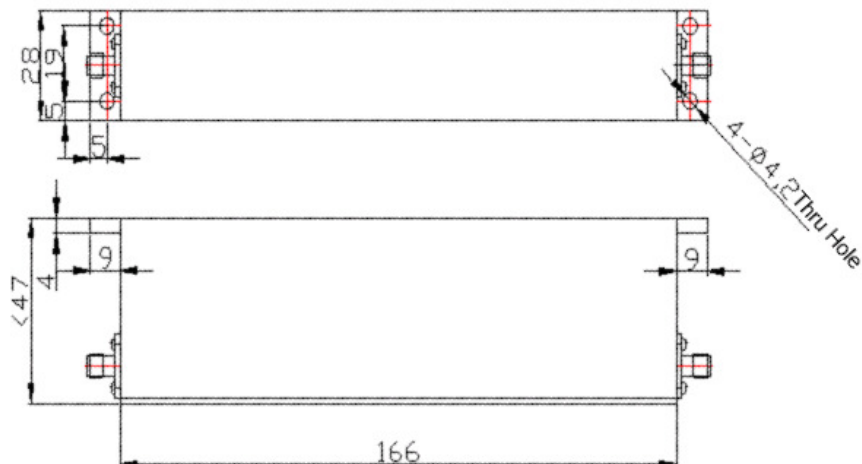

Test Report

