

Part No. WFIL-N1930-1995F-01

1930-1995MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Description	Notch Filter
F0	1962.5MHz
Notch Depth	40dB min.: 1930-1995MHz
Passband	DC-1915MHz , 2010-4000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	20W
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55℃

Outline

Unit:mm

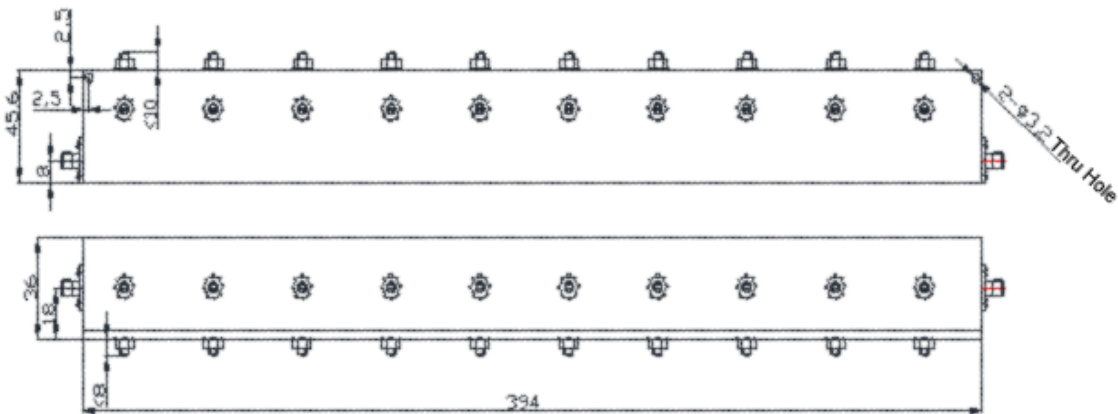

Test Report

