

Part No. WFIL-N2110-2200F-01

2110-2200MHz Notch Filter/SMA/LTE Band 65 or 66 Downlink



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	2155MHz
Notch Depth	45dB min: 2110-2200MHz
Passband	DC-2060MHz,2250-13000MHz
Insertion Loss	2.5dB max@DC-2060MHz,2250-10000MHz 3.0dB max.@10000-13000GHz
Return Loss	10dB min.@DC-2060MHz,2250-8000MHz 6dB min. @8000-13000MHz
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

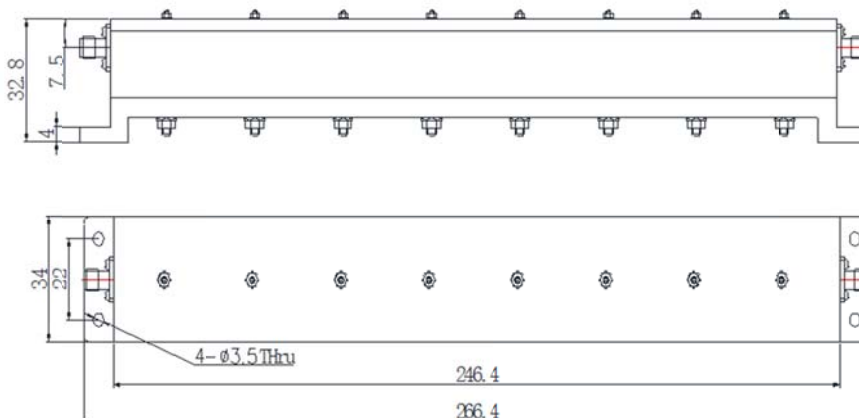

Test Report

