

Part No. WFIL-N2400-2500F-05

2400-2500MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Description	Notch Filter
F0	2450MHz
Notch Depth	50dB min.: 2400-2500MHz
Passband	DC-2170MHz , 3000-12000MHz
Insertion Loss	1.5dB max.
Return Loss	9.5dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55℃

Outline

Unit:mm

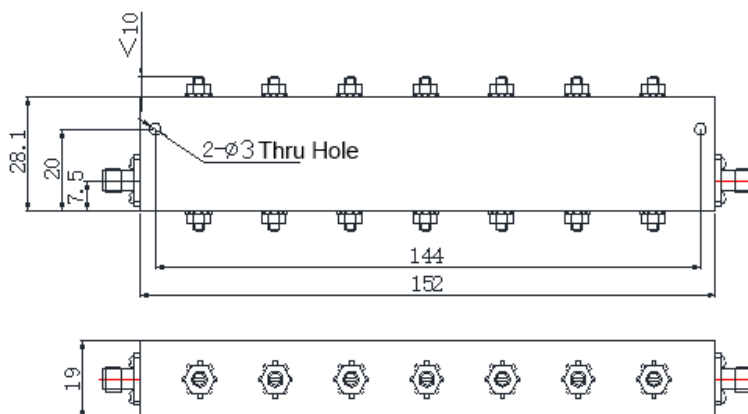

Test Report

