

Part No. WFIL-N2500-2570F-05

2500-2570MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	2535MHz
Notch Depth	40dB min.: 2500-2570MHz
Passband	DC-2475MHz ,2595-8000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	50W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

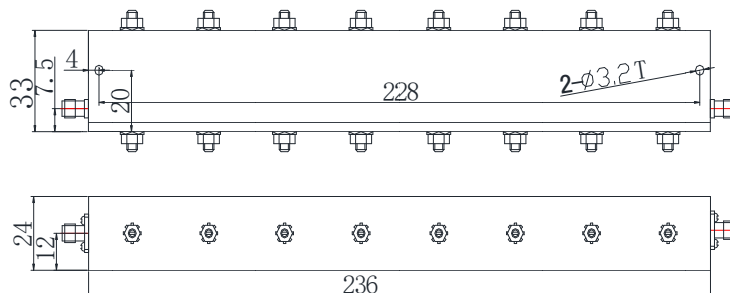

Test Report

