

Part No. WFIL-N3540-3560F

3540-3560MHz Notch Filter/SMA



Features:


- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification	
Description	Notch Filter
F0	3550MHz
Notch Depth	30dB min.: 3540-3560MHz
Passband	DC-3514.5MHz,3585.5-7200MHz
Insertion Loss	1.0dB max .
VSWR	2.0:1 max.
Passband Ripple	0.9dB max.
Impedance	50 Ohm
Power Handling	3W
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55℃

Outline
Unit:mm

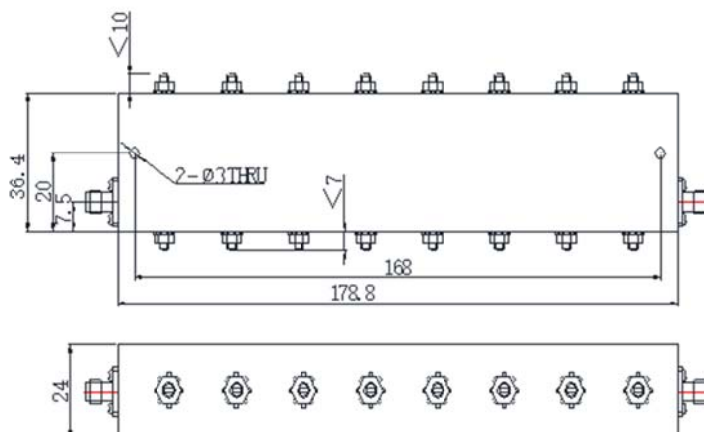

Test Report

