

Part No. WFIL-N452.5-457.5F

452.5-457.5MHz Notch Filter/SMA



Features:


- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification	
Description	Notch Filter
F0	455MHz
Notch Depth	40dB min.: 452.5-457.5MHz
Passband	DC-432.5MHz , 477.5-3000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.@DC-432.5MHz,477.5-1200MHz 5dB min.@1200-3000MHz
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+55℃

Outline
Unit:mm

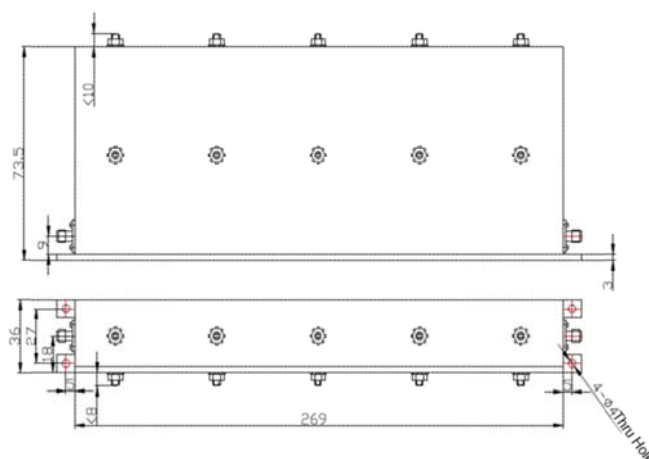

Test Report

