

Part No. WFIL-N462.5-467.5F

462.5-467.5MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	465MHz
Notch Depth	40dB min.: 462.5-467.5MHz
Passband	DC-442.5MHz , 487.5-3000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.@DC-442.5MHz,487.5-1200MHz 5dB min.@1200-3000MHz
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

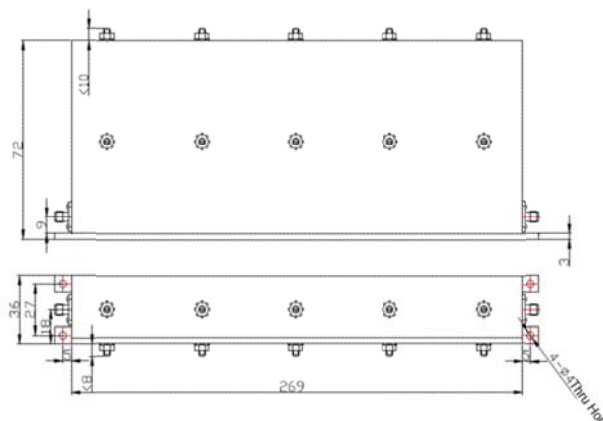

Test Report

