

Part No. WFIL-N663-698F

663-698MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	680.5MHz
Notch Depth	40dB min.: 663-698MHz
Passband	DC-648MHz , 713-3000MHz
Insertion Loss	2.8dB max. @DC-648MHz ,713-2000MHz 3.0dB max. @2000-3000MHz
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	20W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

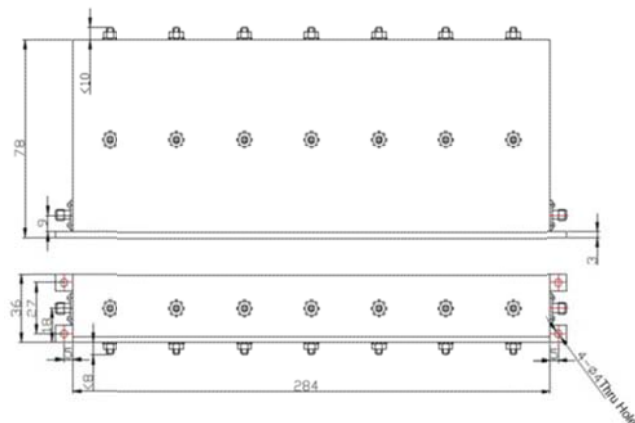

Test Report

