

Part No. WFIL-N670.5-690.5F

670.5-690.5MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	680.5MHz
Notch Depth	30dB min.: 670.5-690.5MHz
Passband	DC-645.5MHz , 715.5-3000MHz
Insertion Loss	DC-645.5MHz,715.5MHz-2GHz:1.0dB max. 2-3GHz:1.5dB max.
Return Loss	9.5 dB min.
Passband Ripple	DC-645.5MHz,715.5MHz-2GHz:0.9dB max. 2-3GHz: 1.4dB max.
Impedance	50 Ohm
Power Handling	3W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

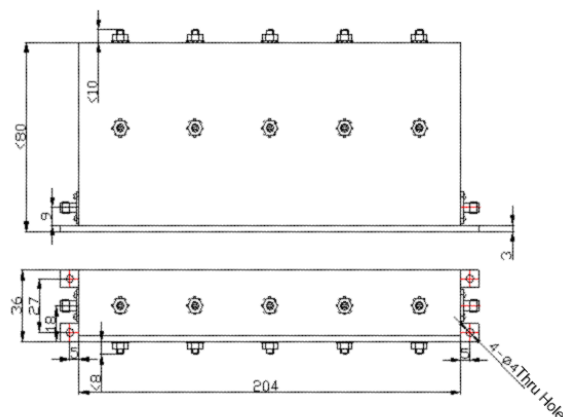

Test Report

