

Part No. WFIL-N703-748F-03

703-748MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	725.5MHz
Notch Depth	40dB min.: 703-748MHz
Passband	DC-678MHz , 773-3500MHz
Insertion Loss	DC-678MHz,773-2500MHz:2.0dB max. 2500-3500MHz:2.5dB max.
Return Loss	10 dB min.
Impedance	50 Ohm
Power Handling	20W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

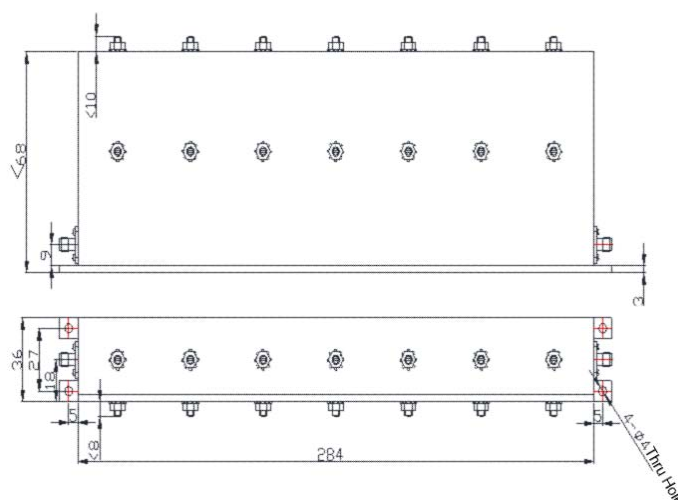

Test Report

