

Part No. WK0802-XX

8GHz SMA 2W Fixed Attenuator/Stainless Steel



Features:

- Smallest models made
- Low VSWR
- All attenuation values available



Electrical Specification

Frequency	DC-8GHz
Attenuation Availability	1.2.3.4.5.6.7.8.9.10.12.15.20.30.40 dB
Accuracy (Max)	0-10dB +/- 0.5dB 20,30dB +/- 0.7dB 40dB +/- 1.0dB XX: 01=1dB , 02=2dB
V.S.W.R (Max.)	1.25:1(Max.)
Input Power	Avg. 2Watts @25°C
Impedance	50 ohm

Material Specification

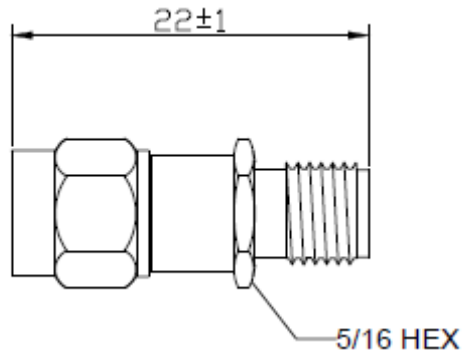
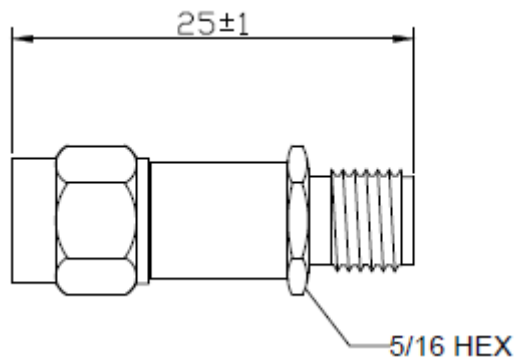
Body	Stainless Steels (SUS-303)
Center Conductor	Gold Plated Beryllium Copper
Insulator	Teflon

Environmental Specification

Operating Temperature	-40~+85℃
-----------------------	----------

Outline Drawing

Unit:mm

1-12dB,20dB**15,30,40dB**

Test Report

10dB

