

Part No. WPRB-40TDR29 Series

DC-40GHz TDR Probe Adapter/2.92mm



Features:

- Low Loss
- Variable Pitch
- Spring-loaded Ground Pin



Electrical Specification

Frequency	DC~40GHz
Insertion Loss	0.5dB max
Return Loss	10dB min
Connector	2.92mm Female

Mechanical Specification

Durability	10K Cycles
Ground	WPRB-40TDR29:2Pin WPRB-40TDR29-01 : 4 Pin WPRB-40TDR29-03 : 2 Pin
Probe Pitch	WPRB-40TDR29:0.8mm WPRB-40TDR29-01 : 1.5&2.5mm WPRB-40TDR29-03 : 1.5 & 2.5mm


Environmental Specification

Operating Temperature	-55 ~+200℃
-----------------------	------------


Outline

Unit:mm


WPRB-40TDR29

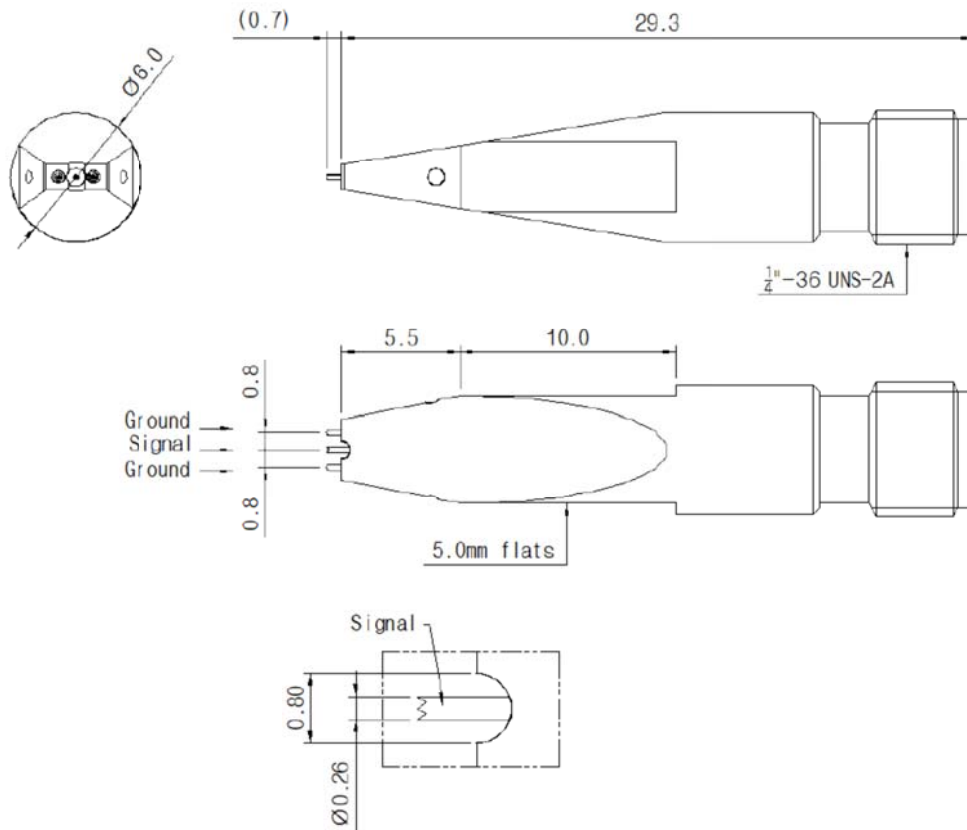



WPRB-40TDR29-01

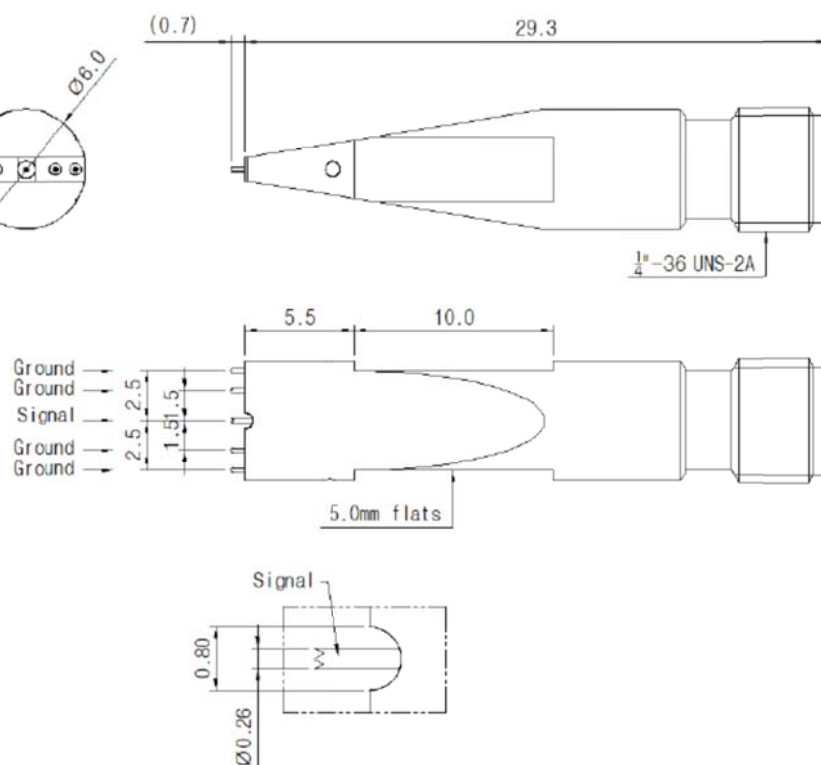

WPRB-40TDR29-03

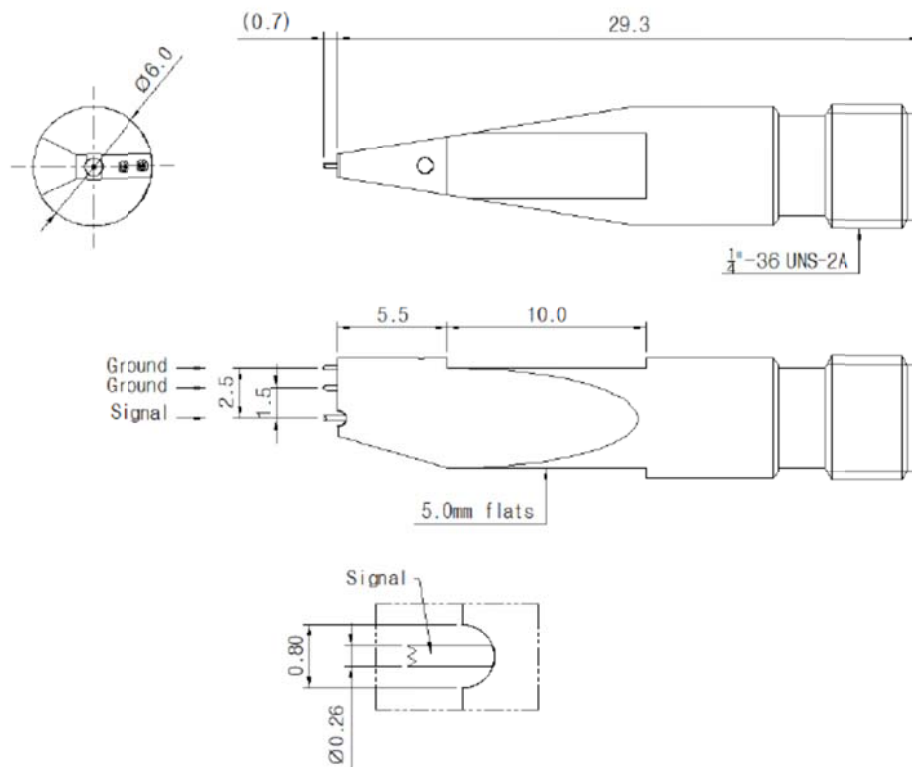

GSG Type

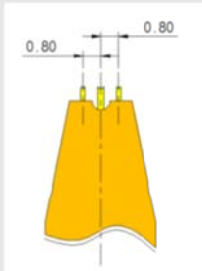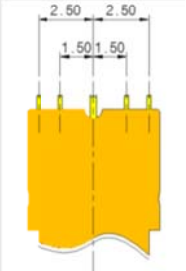Part No.	WPRB-40TDR29	WRRB-40TDR29-01
Pitch (mm)	0.8	1.5 & 2.5
Structure		

GS Type

