

Part No. WTER-40291

40GHz 1W 2.92mm(M) 50Ω Termination



Features:

- Small Size
- Lightweight
- Low VSWR



Electrical Specification

Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.25:1 max
Power Handling	1W
Connector Type	2.92mm Male

Material Specification


Housing	SU303F Polished & Passivated
Center Contact	Beryllium Copper Plated Gold
Insulator	PEI

Environmental Specification

Operating Temperature	-55~+125°C
-----------------------	------------

Outline

Unit:mm(inch)

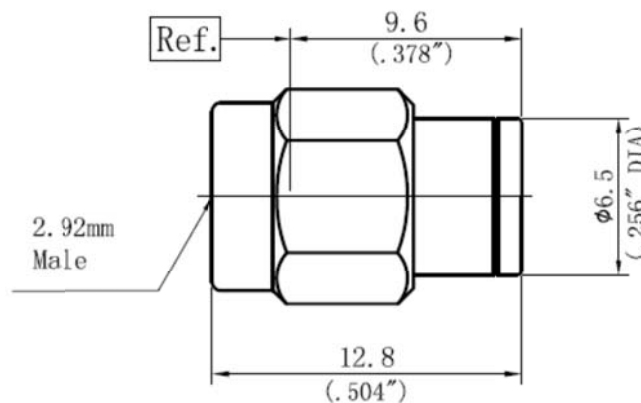

Test Report

