

Part No. WTER-40292

40GHz 2W 2.92mm(M) 50Ω Termination



Features:

- Small Size
- Lightweight
- Low VSWR



Electrical Specification

Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.25:1 max
Power Handling	2W(Avg.)
Connector Type	2.92mm Male

Mechanical Specification

Durability	200 Cycles
------------	------------

Material Specification


Housing	SU303/Passivated
Center Contact	Gold Plated Beryllium Copper
Insulator	PEI

Environmental Specification

Operating Temperature	-40~+125℃
-----------------------	-----------

Outline

Unit:mm

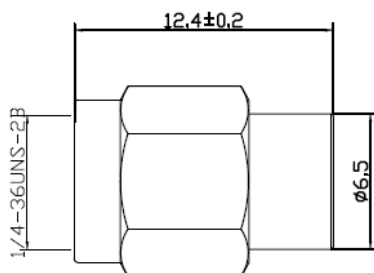

Test Curve

