



沃肯科技有限公司



Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Notch Filter Specification

Features:

- a) Low VSWR
- b) Low Insertion Loss
- c) High Performance



Specifications

Electrical	
Part No.	EWT-14-0162
Description	Notch/Bandreject Filter
F0	1,747.6 MHz (Channel 699)
Notch Depth	50dB(Min.)@F0+/-200KHz
3dB Bandwith	14 MHz (Max.)
Insertion Loss	2dB(Max.)@2,500~3,000 MHz 3dB(Max.)@30~1,710MHz & 1,785~2,500MHz 8dB(Max.)@1,710~1,736.6MHz & 1,758.6~1,785MHz
Passband VSWR	2.0:1
Power Handling	2W
Termination	50 Ohm
Connector	SMA Female
Mechanical	
Approx Size	6.75" X 3.0 " X 1.25"

** All Specification Changed Without Notification. **



沃肯科技有限公司




Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Test Report

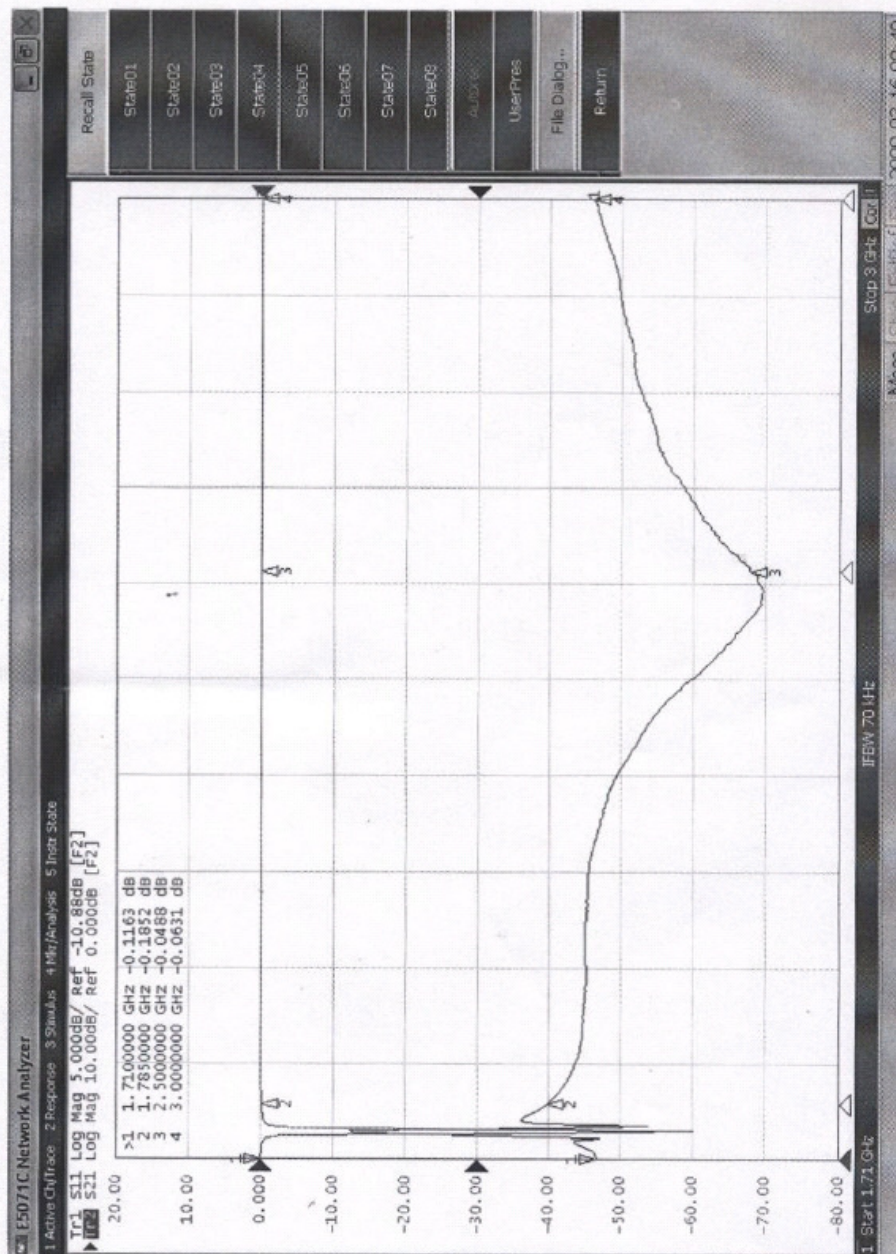

EWT Part Number: EWT-14-0162


Serial Number: K1

S.O. Number: 21825

Cust. Part Number: N/A

Technician: L. P.

Date: March 16, 2009






沃肯科技有限公司



Web: Taiwan: www.woken.com.tw

China: www.wokentech.com

E-Mail: service_woken@woken.com.tw

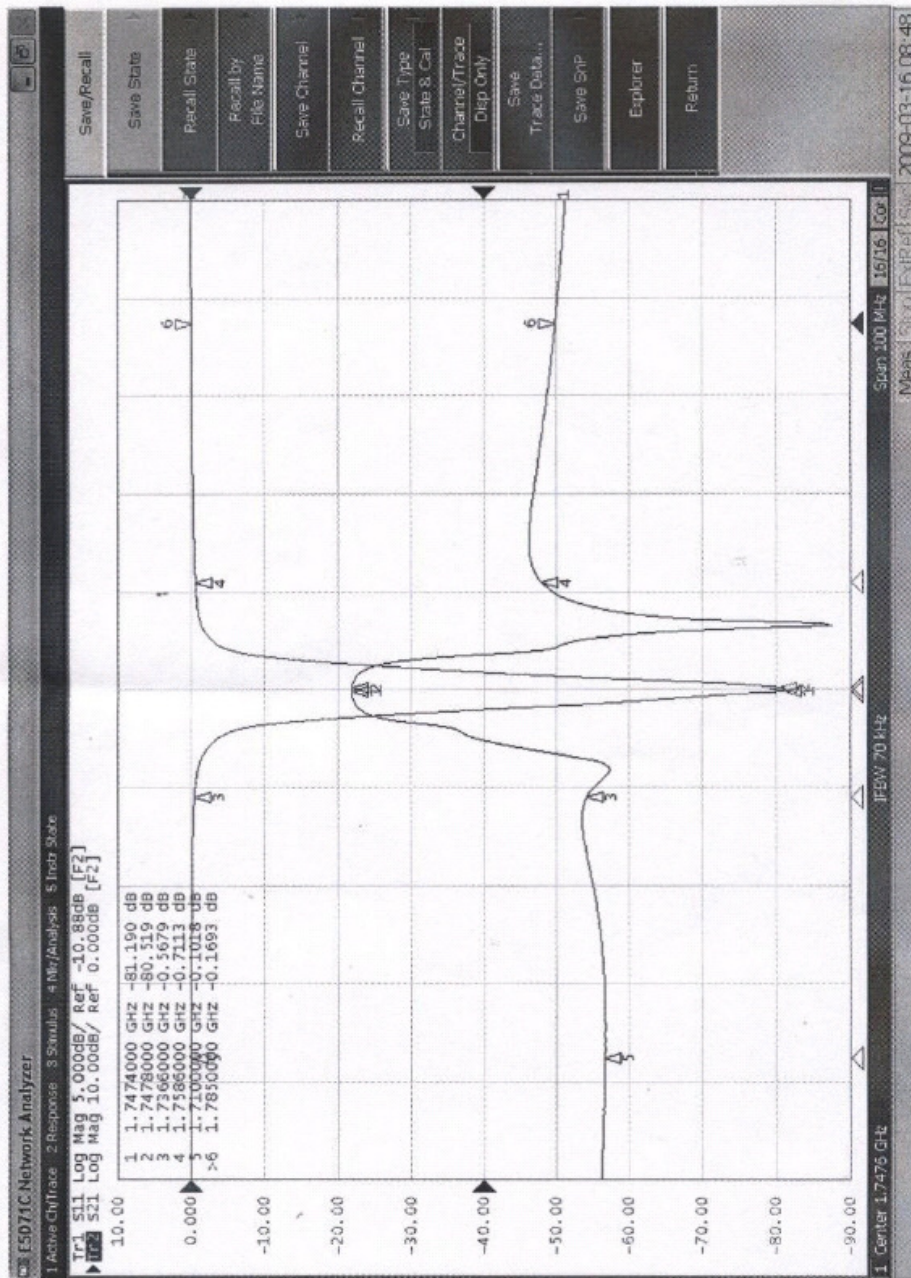

999-00049 Rev 1

EWT Part Number: EWT-14-0162
Serial Number: K1
S.O. Number: 21825

Cust. Part Number: N/A
Technician: L. P.
Date: March 16, 2009

