



沃肯科技有限公司



Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Highpass Filter Specification Features:

- a) Low VSWR
- b) Low Insertion Loss
- c) High Performance



Specifications

Electrical	
Part No.	EWT-57-0027
Description	Highpass Filter
Cutoff Frequency	3.1GHz
Passband	3.1-18GHz(Min.)
Passband Insertion Loss	1.5dB(Max.)
Passband VSWR	2.0:1
Rejection	40dB(Min.)@2.6GHz 55dB(Min.)@2.48GHz 75dB(Min.)@2.36GHz
Power Handling	5W
Termination	50 Ohm
Connector	SMA Female
Enviromental	
Operating Temp.	-10~+60°C

** All Specification Changed Without Notification. **



沃肯科技有限公司




Web: Taiwan: www.woken.com.tw

China: www.wokentech.com

E-Mail: service_woken@woken.com.tw

Test Report

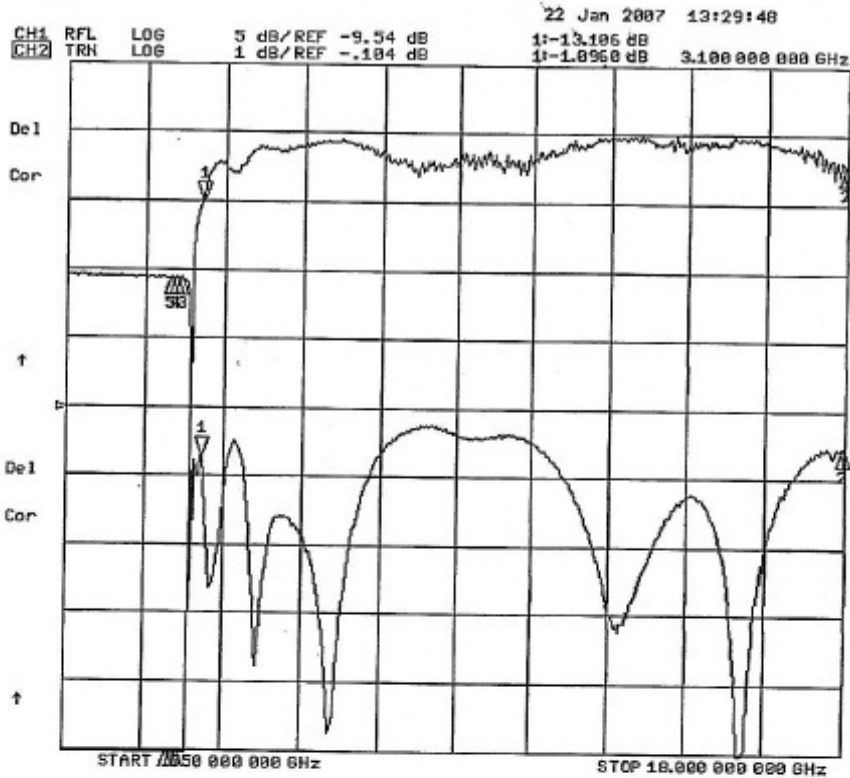


CH2 Markers

2: -56.000 dB
17.9144 GHz
3: -49.002 dB
2.60000 GHz
4: -59.994 dB
2.40000 GHz
5: -75.742 dB
2.36000 GHz



Q.C.

Cust. Part Number: N/A
Technician: DJT
Date: January 22, 2007

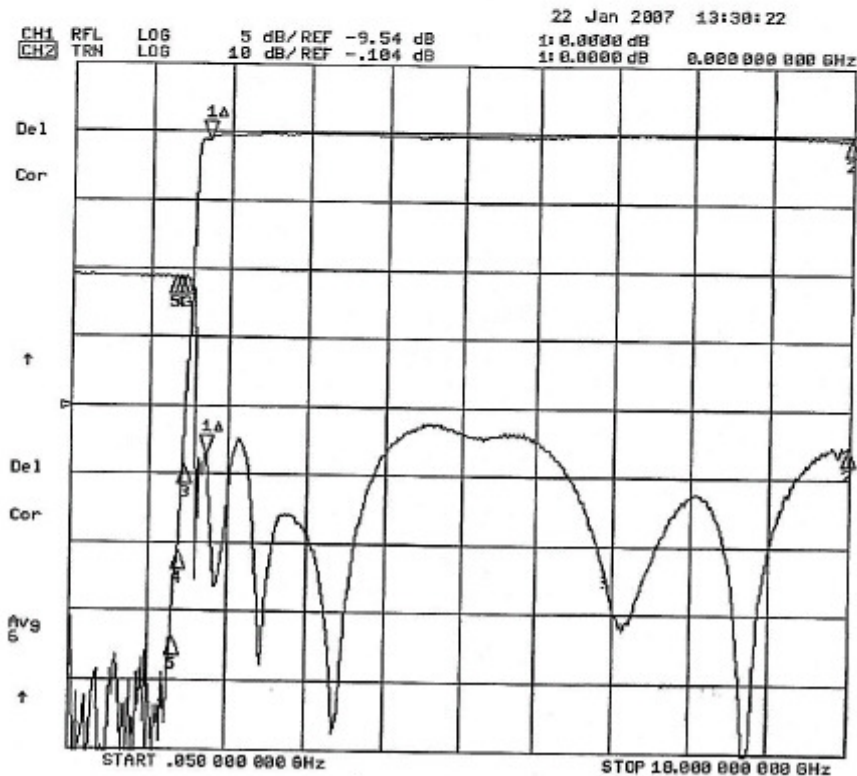

CH2 Markers

4: REF=1
2: -51.300 dB
14.8019 GHz
3: -47.900 dB
-512.565 MHz
4: -50.637 dB
-532.565 MHz
5: -73.019 dB
-752.565 MHz

EWT Part Number: EWT-57-0027
Serial Number: G1
S.O. Number: 21084



Form: 999-00016 Rev. 1