



沃肯科技有限公司



Web:Taiwan: www.woken.com.tw

China:www.wokentech.com

E-Mail:service_woken@woken.com.tw

Highpass Filter Specification

Features:

- a) Low VSWR
- b) Low Insertion Loss
- c) High Performance



Specifications

Electrical	
Part No.	EWT-57-0095
Description	Highpass Filter
Passband	300 ~1,000 MHz
Passband Insertion Loss	2.5dB(Max.)
VSWR	1.8 : 1 (Max.)
Rejection	50dBc@200MHz
Power Handling	5W CW (Max.)
Termination	50Ohm
Connector	SMA Female
Mechanical	
Approx. Size	1.7" x 0.8" x 0.6"
Enviromental	
Temperature Range	-10℃ to +60℃

** All Specification Changed Without Notification. **



沃肯科技有限公司




Web: Taiwan: www.woken.com.tw

China: www.wokentech.com

E-Mail: service_woken@woken.com.tw

Test Report

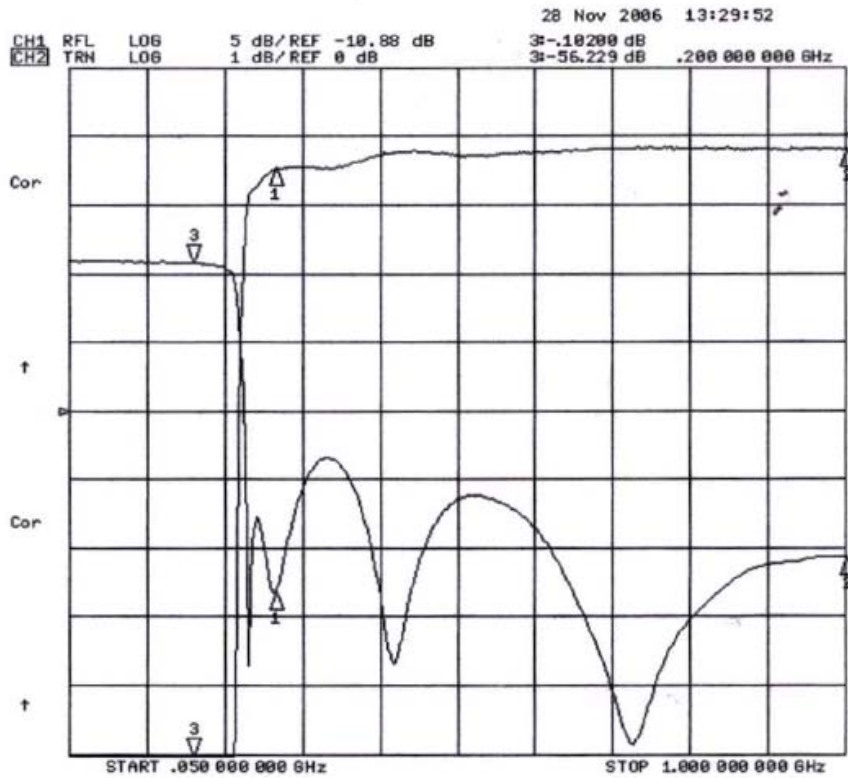


CH2 Markers
1~-47.900 dB
300.000 MHz
2~-19.300 dB
1.00000 GHz



Q.C.

Cust. Part Number: N/A
Technician: D. J. J.
Date: November 28, 2006

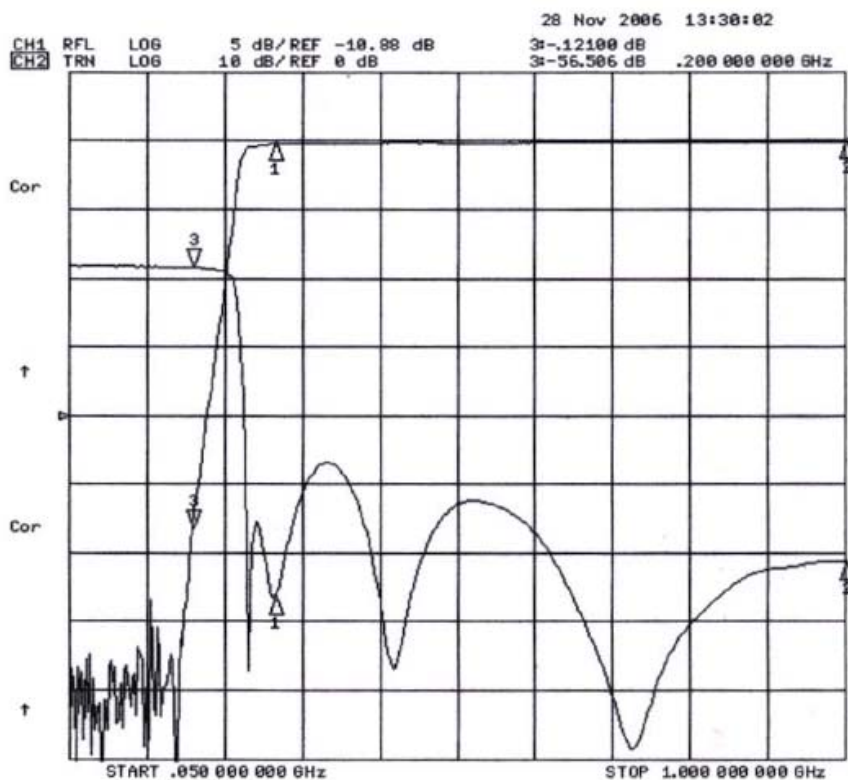

CH2 Markers
1~-48.400 dB
300.000 MHz
2~-20.200 dB
1.00000 GHz

EWT Part Number: EWT-57-0095
Serial Number: G1
S.O. Number: 21031



orm: 999-00016 Rev. 1