

Part No. WADP-29FWR28

26.5-40GHz 2.92mm(F)-WR28(UBR320) Waveguide to Coax Adapter



Features:

- High repeatability
- Low VSWR




Electrical Specification	
Frequency	26.5-40GHz
Impedance	50 Ohm
VSWR	1.2:1 Max.
Insertion Loss	0.3dB Max.
Waveguide Size	WR28
Waveguide Flange	UBR320
Coaxial Connection	2.92mm Female

Material Specification	
Material	Aluminum/Brass
Finish	Yellow Oxidation Inside /Gold plating inside
Coating	Blue Painting Outside

Outline

Unit:mm

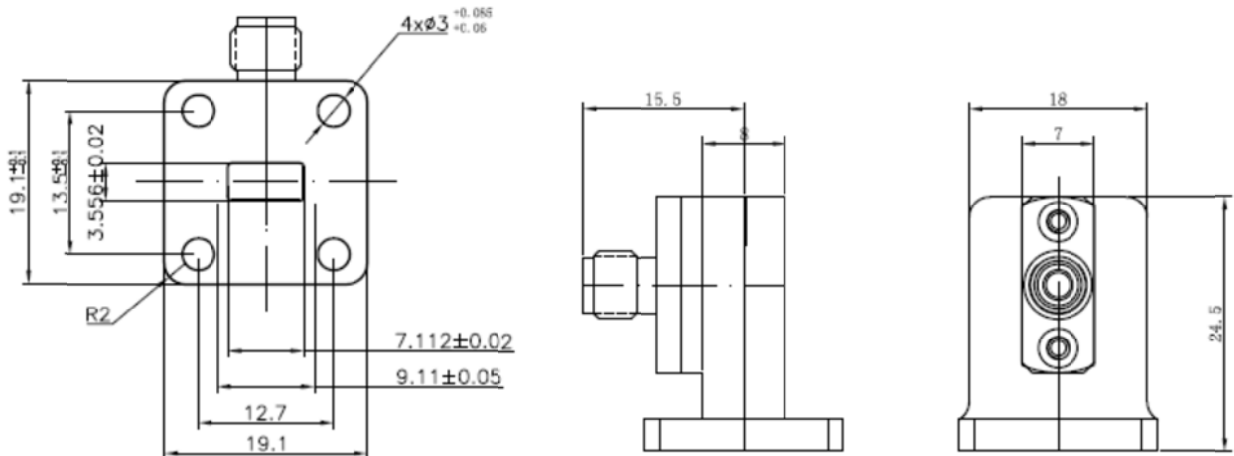

Test Report

This data is the value of the two

