

Part No. WFIL-H4000-18000F

4-18GHz Highpass Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Pass Band Frequency	4-18GHz
Description	Highpass Filter
Insertion Loss	1.5dB max.
Return Loss	10dB min.
Rejection	DC-2.5GHz: 50 dB min.
Impedance	50 Ohm
Power Handling	5W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

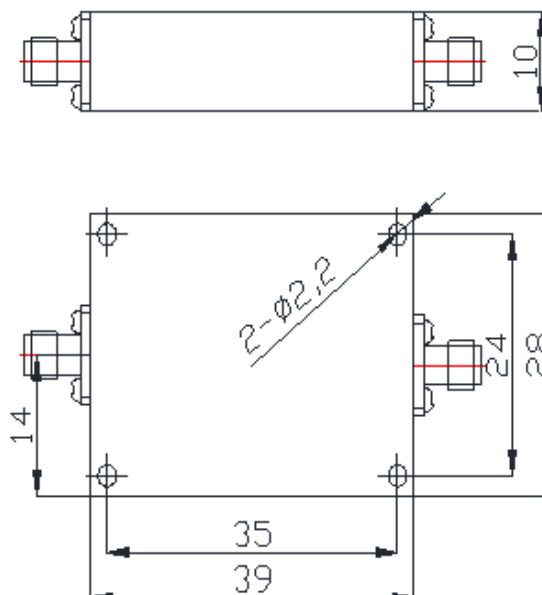

Test Report

