

Part No. WFIL-N1805-1880F-01

1805-1880MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Description	Notch Filter
F0	1842.5MHz
Notch Depth	55dB min.: 1805-1880MHz
Passband	DC-1785MHz , 1900-4000MHz
Insertion Loss	2.9dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	20W
Connector Type	SMA

Environmental Specification	
Operating Temperature	0~+50°C

Outline

Unit:mm

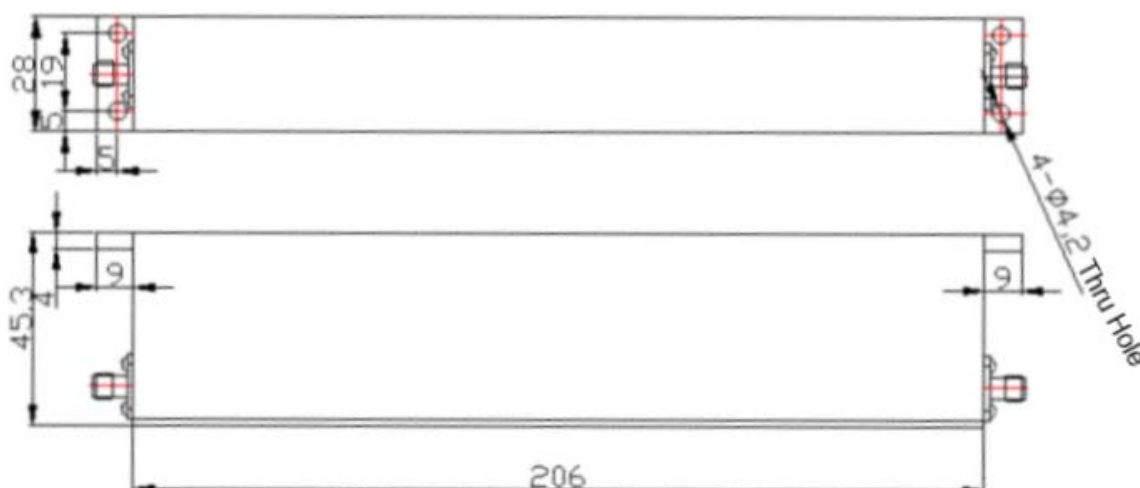

Test Report

