

Part No. WFIL-N1805-1880F-04

1805-1880MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	1842.5MHz
Notch Depth	40dB min.: 1805-1880MHz
Passband	DC-1755MHz , 1935-3000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	30W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

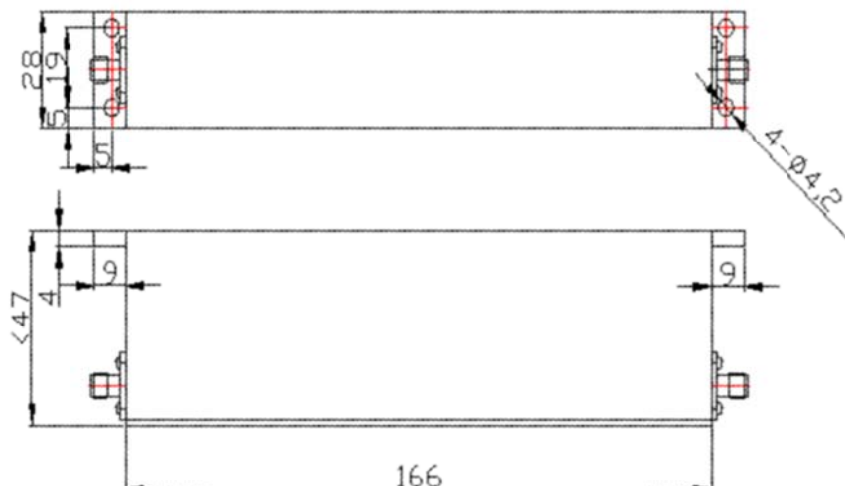

Test Report

