

Part No. WFIL-N3300-3850F

3300-3850MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	3575MHz
Notch Depth	40dB min.: 3300-3850MHz
Passband	DC-3270MHz , 3880-6500MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

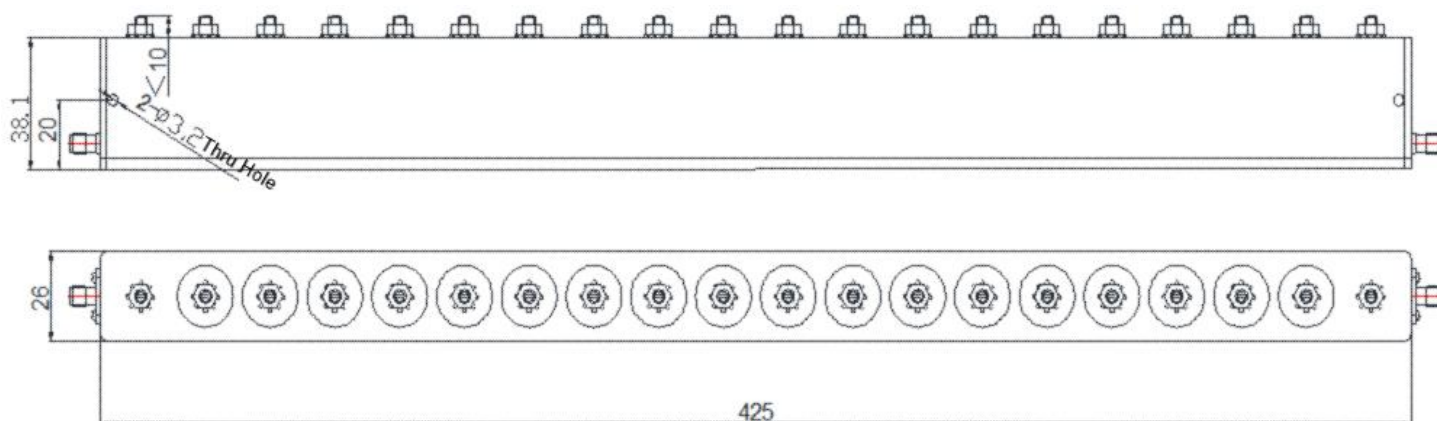

Test Report

