

Part No. WFIL-N832-862F-02

832-862MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	847MHz
Notch Depth	50dB min: 832-862MHz
Passband	DC-792MHz,902-3000MHz
Insertion Loss	2.0dB max
Return Loss	10dB min
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA </td

Environmental Specification

Operating Temperature	0~+55℃
-----------------------	--------

Outline

Unit:mm

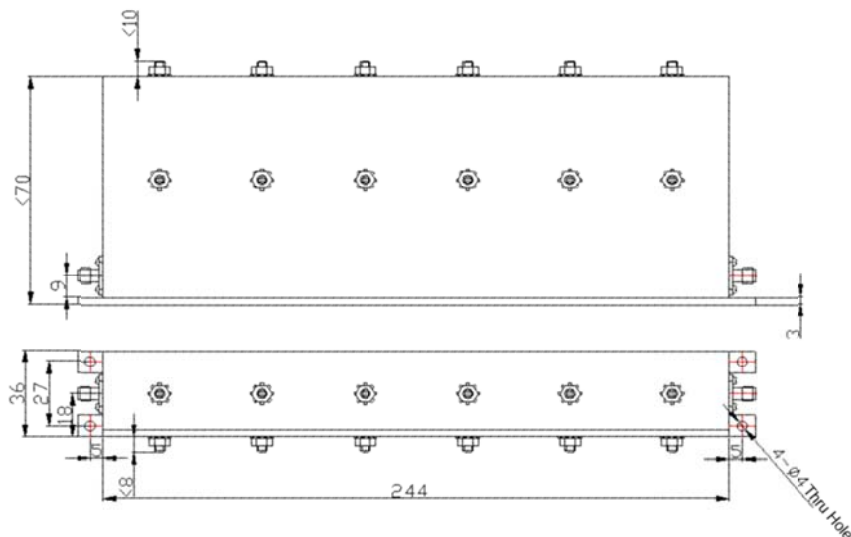

Test Report

