

Part No. WFIL-N875-885F

875-885MHz Notch Filter/SMA



Features:

- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification


Description	Notch Filter
F0	880MHz
Notch Depth	40dB min.: 875-885MHz
Passband	DC-860MHz , 900-3000MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Impedance	50 Ohm
Power Handling	10W
Connector Type	SMA

Environmental Specification

Operating Temperature	0~+55°C
-----------------------	---------

Outline

Unit:mm

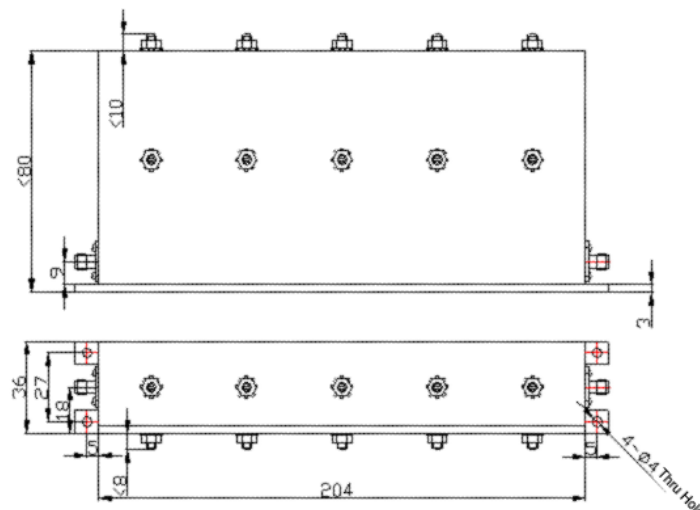

Outline

