

Part No. WPHA-SMSF

18GHz SMA(M)-SMA(F) 60ps Phase Adjuster



Features:

- Low Insertion Loss
- Low VSWR




Electrical Specification

Frequency	DC-18GHz
VSWR	1.3:1(Max.)
Insertion Loss	0.7dB(Max.)
Delay Time	60ps
Phase Shift	1.666ps/1turn
Impedance	50 ohm

Outline

Unit:mm

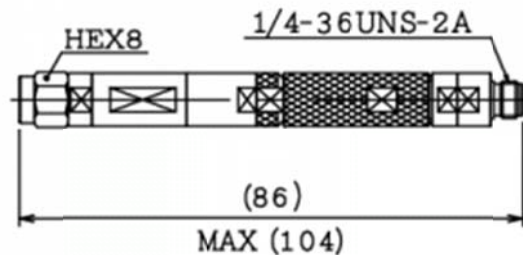

Outline

