



90193-F35351-7

Testing Probe

6GHz 50Ω IP A13(M)/Gold- SMA(F)/Stainless 2Hole Flange Probe Adapter

Features

- ✓ High Repeatability
- ✓ Low VSWR



Test Report

Electrical Specifications


Frequency	DC-6GHz
VSWR	1.5:1(Max.)
Insertion Loss	0.5dB(Max.)
Impedance	50Ohm
Connection 1	SMA Female
Connection 2	IP A13 Male
Ref.	90539

Mechanical

Durability	500 Cycles (Min.)
------------	-------------------

Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------

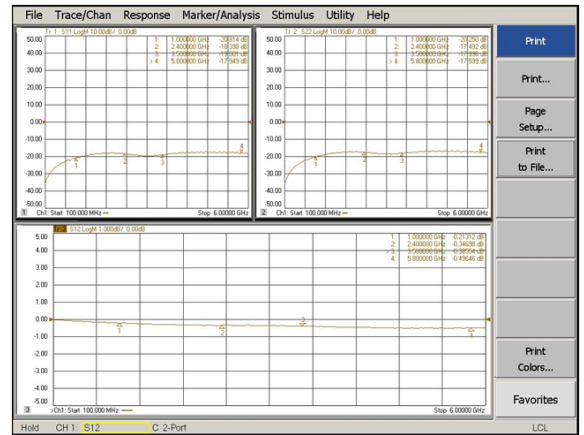

Material

Part	Material	Plated
IP A13 Body	Brass	Gold
Center Pin	Beryllium Copper	Gold
Insulator	Teflon	
Spring	SWP	
Press Body	Brass	Gold
Spring	SWP	Gold
Panel Body	Brass	Gold
Insulator	Teflon	
Center Pin	Phosphor Bronze	Gold
SMA Body	Stainless Steel	

Note.

- 1.測試數據為實驗室測試值
- 2.產品使用壽命受使用環境、公差等因素所影響，實際使用壽命以客戶端測試使用狀況為主

Outling Drawing (Unit:mm) Tolerance:±0.1mm

